

BARGE VAPOR TIGHTNESS LETTER

NOTE: Test results are valid for (1) one year from date of test.

- Test date: 9-22-18
- Barge owner: Le Beauf
- Barge name / Official Number: Gonsoulin 549
- Maximum load rate (BPH): 5000 (BPH)

→ Pressure cargo tanks and vapor system to (28) twenty-eight inches of water using a Manometer to record the time and pressure. Close all air valves and allow the vessel to remain pressured for (30) thirty minutes. Use soap to test and inspect for leaks. After (30) thirty minutes, record pressure and times.

→ Test cargo tanks & Vapor System to 28" inches of water.

→ Start Time: 18:00 Beginning Pressure: 28"

→ End Time: 18:30 Ending Pressure: 27.5"

✓ This vessel has been tested in accordance with Section 61.304F and has been found to be vapor tight.

Company of Tester:

Location:

KSOLV Maritime Channelview TX

Name of Tester (print):

Signature of Tester:

JUAN CRUZ JUAN CRUZ


Name of Witness (print):

Signature of Witness:

Erik Garcia Erik Garcia

Affiliation / Company of Witness (print)

Foreman / KSOLV Maritime JUAN CRUZ

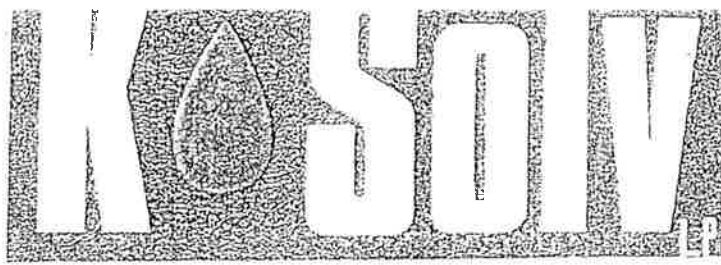

BARGE PIPING LETTER

INSTRUCTIONS: ALL FIELDS ARE REQUIRED. USE N/A ON ANY NON-APPLICABLE LINE

BARGE OWNER / BARGE NAME: Le Bourg / Gonsolein 549

Letter expiration date (one year from test date): 9-22-19

NOTE: Test results are valid for (1) one year from date of test

1. Cargo Piping and Valves (actual date of test): 9-22-18
Test Pressure (188 psi): 188 PST

2. Cargo Relief Valve (actual date of test): 9-22-18
Test Pressure (125 psi): 125 PST

3. Cargo Pressure Gauge (actual date of test): 9-22-18
Percent of Accuracy (%): 98%

4. Steam Piping and Relief Valves (actual date of test): N/A
Test Pressure (125 psi): N/A

Signature of Tester:	<u>JUAN CRUZ</u>
Printed Name of Tester:	<u>JUAN CRUZ</u>
Company / Location of Tester:	<u>KSOLV Maritime / Channelview tx</u>

1651 7 De Zavalla Rd Channelview, TX 77530

Phone: 281-452-4000 Fax: 281-452-5523 Revised 02/03/2017



Certificate of Hose Inspection

During any test or inspection required, the entire external surface of the hose must be accessible. Each line must:

- (i) Have no unrepaired loose covers, kinks, bulges, soft spots or any other defect which would permit the discharge of oil or hazardous material through the hose material, and no gouges, cuts or slashes that penetrate the first layer of hose reinforcement as defined in §156.120(i).
- (ii) Have no external deterioration and, to the extent internal inspection is possible with both ends of the hose open, no internal deterioration;

Date of Test:	<u>9-22-18</u>	Hose Serial No.	<u>NCO 4726</u>
Hose Diameter:	<u>8"</u>	Hose Length:	<u>25'</u>
End Connections:	<u>Mild Steel</u>	Alloy of Fittings:	<u>8" Floating Flange</u>
Hose Type:	<u>Vapor Hose</u>	Hose Cover Material:	<u>composite</u>
Working Pressure:	<u>75 PSI</u>	Test Pressure:	<u>115 PSI</u>
Continuity/Resistance:	<u>Good</u>	Manufacture Date:	<u> </u>
Comments:	<u>Tested good</u>		

K-Solv, LP. has subjected the above described Hose to a pressure test meeting the requirements of 33 CFR 156.170, as well as an electrical continuity and resistance test.

The hose working pressure is 200 but due to the end connections only being rated at 150wp, the overall Assembly is rated at 150 wp.

Ash Beatty P.E.
K-Solv Testing Program
Approved by
Nov. 2012

JUAN CRUZ
Test Conducted by

Eric [Signature]
Test Witnessed by